

Colour code

- black - 2
- silver - 3
- graphite-mica finish - 4
- anthracite grey - 6
- silver anthracite - 7
- choice of colours - 9

Please complete reference no. with colour code for visible metal parts

Specification example:
SX 240 29-9

1 EVOLIS 405 System-Pole single

System-Pole made of treated pine, FSC certified, conical, with square base and round pole top, die-cast aluminium bracket, L: 450mm, pole base fitter of galvanised steel, painted, features extended buried base and anti-sink plate set, CE-approval according to EU construction-product regulations, supplied with IP 54 fuse box 2x5x16mm² for loop in-and-out, wood colour: light oak. For attachment of: DISCERA 400.



Pole with single bracket H: 4000/800mm for spigot Ø: 42mm **SX 241 20-**

2 EVOLIS 409 System-Pole double

System-Pole made of treated pine, FSC certified, conical, with square base and round pole top, die-cast aluminium bracket, L: 900mm, pole base fitter of galvanised steel, painted, features extended buried base and anti-sink plate set, CE-approval according to EU construction-product regulations, supplied with IP 54 fuse box 2x5x16mm² for loop in-and-out, wood colour: light oak. For attachment of: DISCERA 400.



Pole with double bracket H: 4000/800mm for spigot Ø: 42mm **SX 242 20-**

3 EVOLIS 607 System-Pole single

System-Pole made of treated pine, FSC certified, conical, with square base and round pole top, die-cast aluminium bracket, L: 730mm, pole base fitter of galvanised steel, painted, features extended buried base and anti-sink plate set, CE-approval according to EU construction-product regulations, supplied with IP 54 fuse box 2x5x16mm² for loop in-and-out, wood colour: light oak. For attachment of: DISCERA 600, DISCERA 750, OVALIS 650, OVALIS 850, STRADEX 500, STRADEX 700, URBI 2.




Pole with single bracket H: 6000/1000mm for spigot Ø: 60mm **SX 243 22-**

4 EVOLIS 615 System-Pole double

System-Pole made of treated pine, FSC certified, conical, with square base and round pole top, die-cast aluminium bracket, L: 1460mm, pole base fitter of galvanised steel, painted, features extended buried base and anti-sink plate set, CE-approval according to EU construction-product regulations, supplied with IP 54 fuse box 2x5x16mm² for loop in-and-out, wood colour: light oak. For attachment of: DISCERA 600, DISCERA 750, OVALIS 650, OVALIS 850, STRADEX 500, STRADEX 700, URBI 2.



Pole with double bracket H: 6000/1000mm for spigot Ø: 60mm **SX 244 22-**

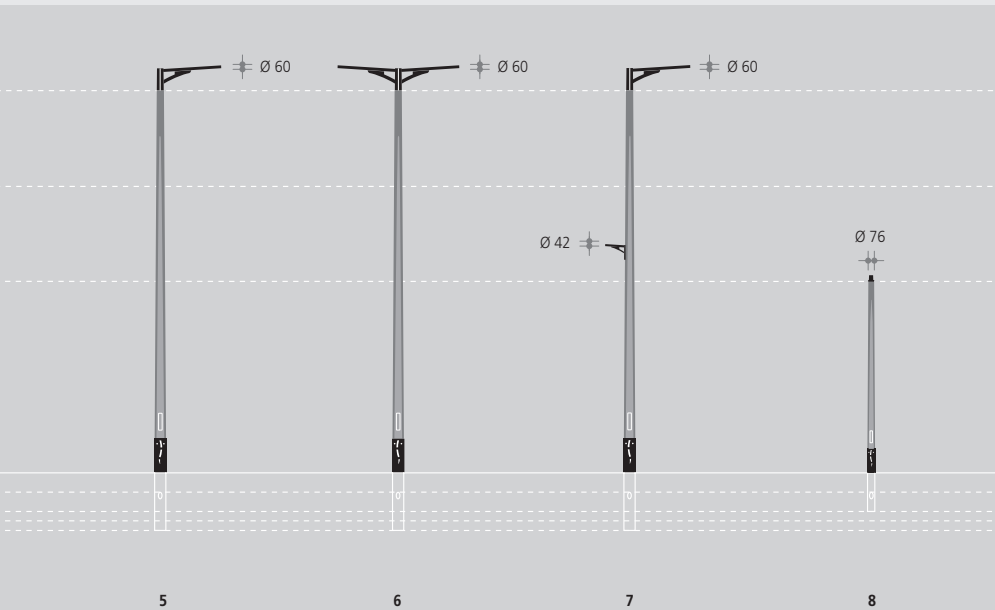

5 EVOLIS 813 System-Pole single

System-Pole made of treated pine, FSC certified, conical, with square base and round pole top, die-cast aluminium bracket, L: 1250mm, pole base fitter of galvanised steel, painted, features extended buried base and anti-sink plate set, CE-approval according to EU construction-product regulations, supplied with IP 54 fuse box 2x5x16mm² for loop in-and-out, wood colour: light oak. For attachment of: DISCERA 600, DISCERA 750, OVALIS 650, OVALIS 850, STRADEX 500, STRADEX 700, URBI 2.

Pole with single bracket H: 8000/1200mm for spigot Ø: 60mm **SX 245 22-**



→ Laminated wooden poles are an important component of exterior lighting products. The use of wood, which by nature is a tough material, is a matter of course for us. The unmistakable character of wood and the emotional response it awakens in us as human beings make for the special quality of this sustainable building material. Using wood is actually a way of counteracting the greenhouse effect. One cubic metre of wood stores one ton of carbon dioxide.

6 EVOLIS 825 System-Pole double

System-Pole made of treated pine, FSC certified, conical, with square base and round pole top, die-cast aluminium bracket, L: 2500mm, pole base fitter of galvanised steel, painted, features extended buried base and anti-sink plate set, CE-approval according to EU construction-product regulations, supplied with IP 54 fuse box 2x5x16mm² for loop in-and-out, wood colour: light oak. For attachment of: DISCERA 600, DISCERA 750, OVALIS 650, OVALIS 850, STRADEX 500, STRADEX 700, URBI 2.

Pole with double bracket H: 8000/1200mm for spigot Ø: 60mm **SX 246 22-**



Wood is completely insensitive to radical changes in temperature and different forms of chloroxidation. All wooden elements are treated before they are built into products, and repainting every seven years renders the wood resistant to mould and insect attack.

7 EVOLIS 818 with roadway / walkway System-Pole

System-Pole made of treated pine, FSC certified, conical, with square base and round pole top, die-cast aluminium bracket, pole base fitter of galvanised steel, painted, CE-approval according to EU construction-product regulations, supplied with IP 54 fuse box 2x5x16mm² for loop in-and-out, wood colour: light oak. For attachment of: DISCERA 750 (roadway), DISCERA 400 (walkway)

Pole with twin brackets for roadway / walkway
H: 8000/1200mm for spigot Ø: 60/42mm **SX 247 22-**




In the process of assembling poles we exclusively deploy wood of the slow growing Nordic spruce, which of course is FSC certified. This guarantees a sustainable forestry. Our products combine wood with metal and change its shape from square to round, thus promoting unmistakable design flair.

8 PROVENCE System-Pole for lantern

System-Pole made of treated pine, FSC certified, conical, with square base and round pole top, die-cast aluminium bracket, pole base fitter of galvanised steel, painted, features extended buried base and anti-sink plate set, CE-approval according to EU construction-product regulations, supplied with IP 54 fuse box 2x5x16mm² for loop in-and-out, wood colour: light oak.

Pole with double bracket H: 4000/800mm for spigot Ø: 76mm **SX 240 16-**



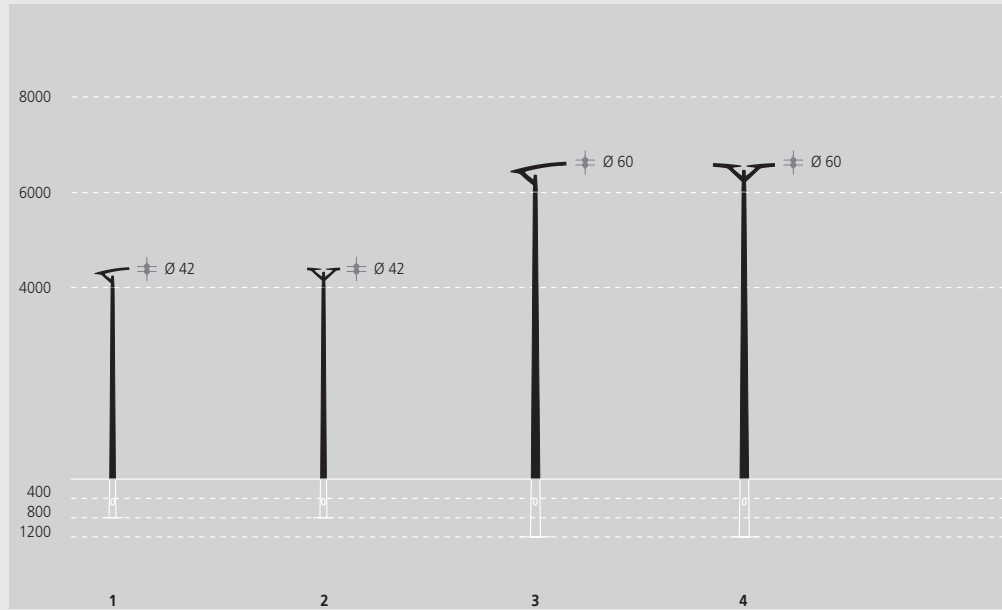

Colour code

- black - 2
- silver - 3
- graphite-mica finish - 4
- anthracite grey - 6
- silver anthracite - 7
- choice of colours - 9

Please complete reference no. with colour code for visible metal parts

Specification example:
SX 240 29-9

1 CITALYS 404 System-Pole single

Conical galvanised steel pole with flush bracket of cast aluminium, L: 350mm, painted, features extended buried base and anti-sink plate set, CE-approval according to EU construction-product regulations, supplied with IP 54 fuse box 2x5x16mm² for loop in-and-out, bi-colour painting: pole graphite - mica finish, bracket and luminaire silver (RAL 9006) [- 4/3]. For attachment of: DISCERA 400



Pole with single bracket H: 4000/800mm for spigot Ø: 42mm **SX 233 20-**

2 CITALYS 404 System-Pole double

Conical galvanised steel pole with flush bracket of cast aluminium, L: 700mm, painted, features extended buried base and anti-sink plate set, CE-approval according to EU construction-product regulations, supplied with IP 54 fuse box 2x5x16mm² for loop in-and-out, bi-colour painting: pole graphite - mica finish, bracket and luminaire silver (RAL 9006) [- 4/3]. For attachment of: DISCERA 400



Pole with double bracket H: 4000/800mm for spigot Ø: 42mm **SX 234 20-**

3 CITALYS 606 System-Pole single

Conical galvanised steel pole with flush bracket of cast aluminium, L: 600mm, painted, features extended buried base and anti-sink plate set, CE-approval according to EU construction-product regulations, supplied with IP 54 fuse box 2x5x16mm² for loop in-and-out, bi-colour painting: pole graphite - mica finish, bracket and luminaire silver (RAL 9006) [- 4/3].

For attachment of: DISCERA 600, OVALIS 650, STRADEX 500, URBI 2 750, URBI 2 1000.



Pole with single bracket H: 6000/1200mm for spigot Ø: 60mm **SX 235 22-**

4 CITALYS 612 System-Pole double


Conical galvanised steel pole with flush bracket of cast aluminium, L: 1200mm, painted, features extended buried base and anti-sink plate set, CE-approval according to EU construction-product regulations, supplied with IP 54 fuse box 2x5x16mm² for loop in-and-out, bi-colour painting: pole graphite - mica finish, bracket and luminaire silver (RAL 9006) [- 4/3].

For attachment of: DISCERA 600, OVALIS 650, STRADEX 500, URBI 2 750, URBI 2 1000.



Pole with double bracket H: 6000/1200mm for spigot Ø: 60mm **SX 236 22-**

Citalys Design: Sovann Kim

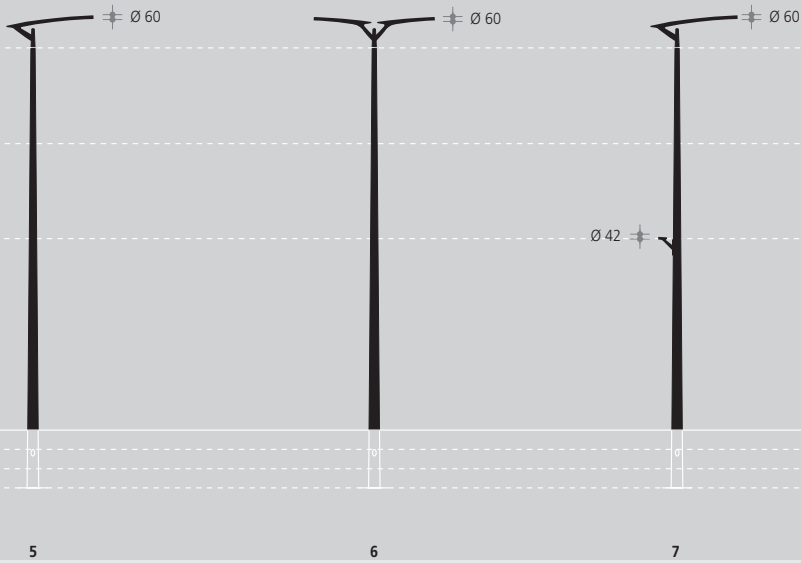

5 CITALYS 813 System-Pole single

Conical galvanised steel pole with flush bracket of cast aluminium, L: 1300mm, painted, features extended buried base and anti-sink plate set, CE-approval according to EU construction-product regulations, supplied with IP 54 fuse box 2x5x16mm² for loop in-and-out, bi-colour painting: pole graphite - mica finish, bracket and luminaire silver (RAL 9006) [- 4/3]. For attachment of: DISCERA 750, OVALIS 850, STRADEX 700, URBI 2 1000.



Pole with single bracket H: 8000/1200mm for spigot Ø: 60mm **SX 237 22-**

6 CITALYS 826 System-Pole double

Conical galvanised steel pole with flush bracket of cast aluminium, L: 1300mm, painted, features extended buried base and anti-sink plate set, CE-approval according to EU construction-product regulations, supplied with IP 54 fuse box 2x5x16mm² for loop in-and-out, bi-colour painting: pole graphite - mica finish, bracket and luminaire silver (RAL 9006) [- 4/3]. For attachment of: DISCERA 750, OVALIS 850, STRADEX 700, URBI 2 1000.



Pole with double bracket H: 8000/1200mm for spigot Ø: 60mm **SX 238 22-**

7 CITALYS 816

Conical galvanised steel pole with flush bracket of cast aluminium, L: 1300mm / 300mm, painted, features extended buried base and anti-sink plate set, CE-approval according to EU construction-product regulations, supplied with IP 54 fuse box 2x5x16mm² for loop in-and-out, bi-colour painting: pole graphite - mica finish, bracket and luminaire silver (RAL 9006) [- 4/3]. For attachment of: DISCERA 750, DISCERA 400,



Pole with twin brackets for roadway / walkway H: 8000/1200mm for spigot Ø: 42mm **SX 239 22-**